

## COMBINATION FIXTURE - 3637-90R&L-LR

Item: \_\_\_\_\_



Unit may be pictured with some optional features.

### 1.6 gpf (6.0 Lpf) Fixtures - 3" waste connection

- ☐ 3637-90R-LR Back supply connection 1<sup>1</sup>/<sub>2</sub>" (38mm) FIPT.
- ☐ 3637-90L-LR Back supply connection 1<sup>1</sup>/<sub>2</sub>" (38mm) FIPT.

### 1.28 gpf (4.8 Lpf) Fixtures - 2-3/8" waste connection (WaterSense)

- ☐ HET3637-90R-LR Back supply connection 1<sup>1</sup>/<sub>2</sub>" (38mm) FIPT.
- ☐ HET3637-90L-LR Back supply connection 1<sup>1</sup>/<sub>2</sub>" (38mm) FIPT.

- **Front mounted cabinet, wall outlet waste.**
- **Lavatory Basin-**
  - Rectangular
  - Fast drain.
  - 4" (102mm) high backsplash.
  - 1<sup>1</sup>/<sub>4</sub>" (32mm) OD elbow sink waste with air vent, plain end extended 4" (102mm) past back of fixture for slip type connection.
- **Toilet Bowl-**
  - Elongated.
  - High polished integral seat.
  - Self draining flushing rim.
  - Blowout flushing action.
  - Fully enclosed trap.
  - Ligature Resistant Skirt.
- **Ligature Resistant Features-**
  - Ligature Resistant Skirt.
  - Grab Bar with Integral Closure Plate.
  - Hemispherical Bubbler.
  - Ligature Resistant Push Button.



Certified by  
QAI Laboratories

WaterSense certified when used with a  
certified high-efficiency flushometer

## ► DESCRIPTION

This ligature resistant combination lavatory/toilet fixture is designed for areas without an accessible pipe chase. Fixtures are fabricated using 14 gauge type 304 stainless steel, welded to form a vandal resistant unit. Internal piping is stainless steel. Exposed surfaces are polished to a satin finish, except for the integral seat which is polished to a bright finish.

## ► PERFORMANCE STANDARDS

Metcraft's standard toilet is a 1.6 gpf (6.0 lpf) fixture with a 3" (76mm) waste outlet. Metcraft offers a "High Efficiency Toilet" (HET) 1.28 gpf (4.8 lpf) with a 2 3/8" (60mm) waste outlet as an option. Metcraft bowls and assemblies are designed to withstand 5000 lb. (22kN) loading without permanent deflection and damage. This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures". The trap will pass a 2 1/8" (54mm) dia. ball. A minimum 1" (25mm) supply providing 35psi (241kPa) flushing pressure is required.

## ► INSTALLATION

These fixtures are secured to the wall from the fixture (cell) side using a eight point anchor system. Eight bolts screw into expansion shields in the wall (Expansion shields are not included). The installer must provide wall openings for piping per rough-in drawings provided by Metcraft. Valves are installed inside the fixture.

Plumbing connections and service are performed through access panels on the sides of the fixture and a sink enclosure beneath the sink. Access panels are secured in place with vandal resistant fasteners provided by Metcraft. Fixture is handicap compliant when installed per guidelines for accessibility.

### Water Consumption:

With a low consumption flush valve - 1.6 gpf (6 liters)

With a HET consumption flush valve - 1.28 gpf (4.8 liters)

### RECOMMENDED FLUSH VALVES

	SLOAN	ZURN	DELANY
Low consumption	603-1.6	Z6603-1.6	623-1.6
HET	603-1.28	Z6603-1.28	

Listed by



**WARNING:** Cancer and Reproductive Harm  
- www.P65Warnings.ca.gov.

**Fixture designed to reduce possible ligature points. Not a substitute for professional supervision.**

Page: 1

**OUTLET/MOUNTING**

- ☐ **FW** On the floor, wall outlet (Standard).  
☐ **FF** On the floor, floor outlet.

**SPOUT**

- ☐ **B1H** Suicide Resistant Filler Spout. (Standard)

**HAND BASINS**

- ☐ **RB** Rectangular Basin. (Standard)

**LAVATORY WASTE**

- ☐ **SJP** Slip Joint P-Trap. (Standard)  
☐ **CWO** Combined Waste.

**TOILET WASTE**

- ☐ **GW** Gasket Waste Outlet. (Standard)  
☐ **PE** Plain End Waste - 2" into fixture.

**PRODUCT OPTIONS**

- ☐ **AFH** Hydraulic Anti-Flood Valve.  
☐ **MS** Mirror Finish Toilet Seat. (Standard)  
☐ **HT** Towel Hook.  
☐ **PH** Recessed Tissue Holder.  
*Not HC Compliant on this Fixture.*  
☐ **OF** Overflow Vent.

**OPTIONS/ACCESSORIES**

- ☐ **A550LR** 24" Wall Grab Bar w/ Closure Plate.  
☐ **A551LR** 36" Wall Grab Bar w/ Closure Plate.  
☐ **A552LR** 42" Wall Grab Bar w/ Closure Plate.  
☐ **A553LR** 48" Wall Grab Bar w/ Closure Plate.  
☐ **A554LR** 18" Wall Grab Bar w/ Closure Plate.  
☐ **A557LR** Fixture Grab Bar w/ Closure Plate.  
☐ **TSC** Toilet Seat Cover (Protects During Install)

**PNEUMATIC VALVE ASSEMBLIES (0.5 GPM Flow Valves)**

- ☐ **A311** Single Temperature, Single Fixture Valve.  
☐ **A312** Dual Temperature, Single Fixture Valve.


**WALL MOUNTED TOILET PAPER HOLDERS (HC Compliant)**

- ☐ **A720** Chase Mounted Recessed Toilet Paper Holder.  
☐ **A721** Front Mounted Recessed Toilet Paper Holder.  
☐ **A722** Ligature Resistant Front Mounted Recessed Toilet Paper Holder.


## COMBINATION FIXTURE - 3637-90R&L-LR

Item: \_\_\_\_\_

**Top View**

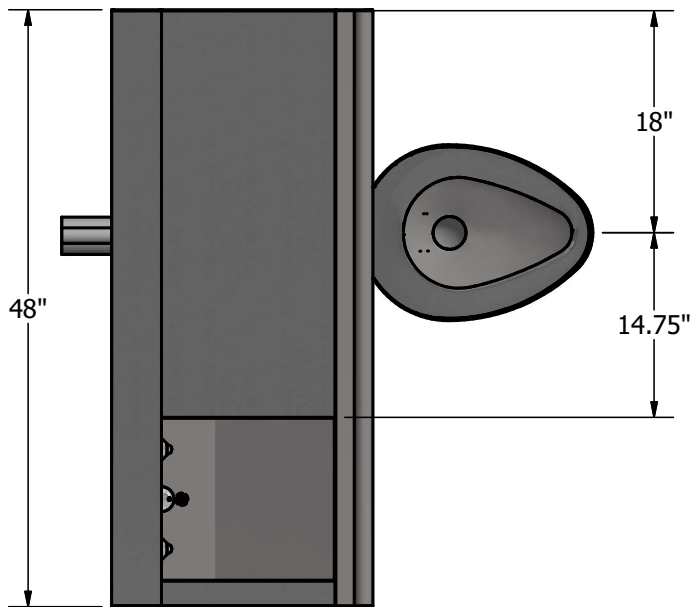

**Left Side View**

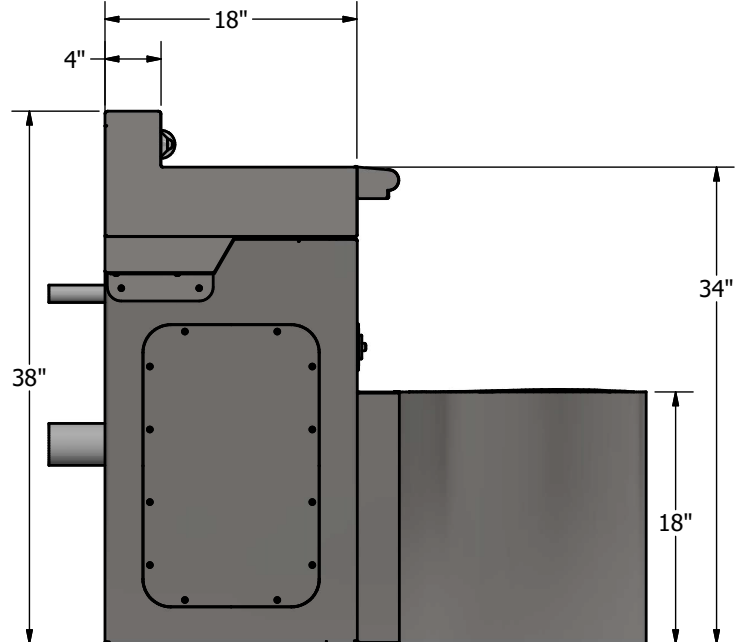

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

**APPROVED FOR  
MANUFACTURING**

Company: \_\_\_\_\_ Name: \_\_\_\_\_  
 Signature: \_\_\_\_\_ Date: \_\_\_\_\_