

LIGATURE RESISTANT FIXTURES

SHOWER FIXTURE - 8640-LR


Item: _____



Unit may be pictured with some optional features.

Fixture designed to reduce possible ligature points. Not a substitute for professional supervision.

STANDARD FEATURES

-  **8640-LR** Front Mounted Shower Fixture.
- STANDARD FEATURES**
- **Front Mount Two Piece Shower**
 - 17 1/2 degree security shower head with vandal resistant adjustable spray.
 - Single temperature pushbutton pneumatic metering valve.
 - 2.5 gallon per minute flow.
 - **Hardware-**
 - Fastened from front side with vandal resistant fasteners.



Certified by
QAI Laboratories

WaterSense certified showerhead
options available.

► DESCRIPTION

This Shower Fixture is designed for areas without an accessible pipe chase. The panels are fabricated using heavy gauge type 304 stainless steel. Exposed surfaces are polished to a satin finish. Panels are secured to the wall using vandal resistant fasteners. All trim is secured to the panels from the front side.

► INSTALLATION

Holes for showerhead supply, soap dish, and push button tubing required. Plates are secured to the wall with wall anchors(supplied by others) and vandal resistant fasteners.

► PERFORMANCE STANDARDS

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".



WARNING: Cancer and Reproductive Harm
- www.P65Warnings.ca.gov.

Listed by






LIGATURE RESISTANT FIXTURES

WALL THICKNESS AND TYPE (Must Specify)

Thickness: _____ Type: ☐ Concrete ☐ Block ☐ Steel





SHOWERHEADS

-  **PSH-1** Shower Head 30dg.
-  **PSH-2** Shower Head 17.5dg.
-  **LBJ** Locking Ball Joint.





SOAP DISHES

- **A503** Recessed Soap Dish.

VALVE ASSEMBLIES



- | | | |
|---|-------------|---|
|  | A311 | Single Temperature, Single Fixture Valve. |
|  | A312 | Dual Temperature, Single Fixture Valve. |
|  | A313 | Single Temperature, Manifoldd Valve. |
|  | A314 | Dual Temperature, Manifoldd Valve. |

FLOW CONTROLS

- | | | |
|---|-------------|-----------------------------|
|  | FC12 | 1.2 gallon per minute flow. |
|  | FC14 | 1.4 gallon per minute flow. |
|  | FC20 | 2.0 gallon per minute flow |
|  | FC25 | 2.5 gallon per minute flow |

SHOWER FIXTURES - 8640-LR

Item: _____

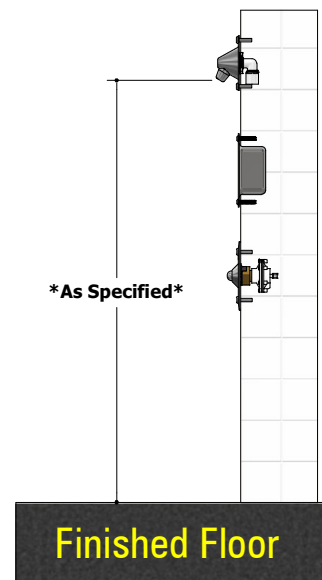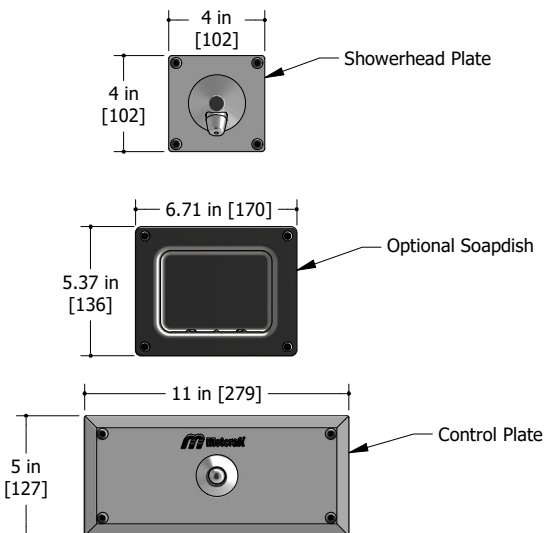

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.


**APPROVED FOR
MANUFACTURING**

Company: _____ **Name:** _____

Signature: _____ **Date:** _____

Item:
Shower Panel: 8640-LR

1. 2.5" x 2.75" (64 x 70) wall opening for showerhead.
2. 3.75" x 5.25" (95 x 133) wall opening for soapdish.
3. 3.75" x 9" (95 x 229) wall opening for valve actuators.
4. Outline of fixture.

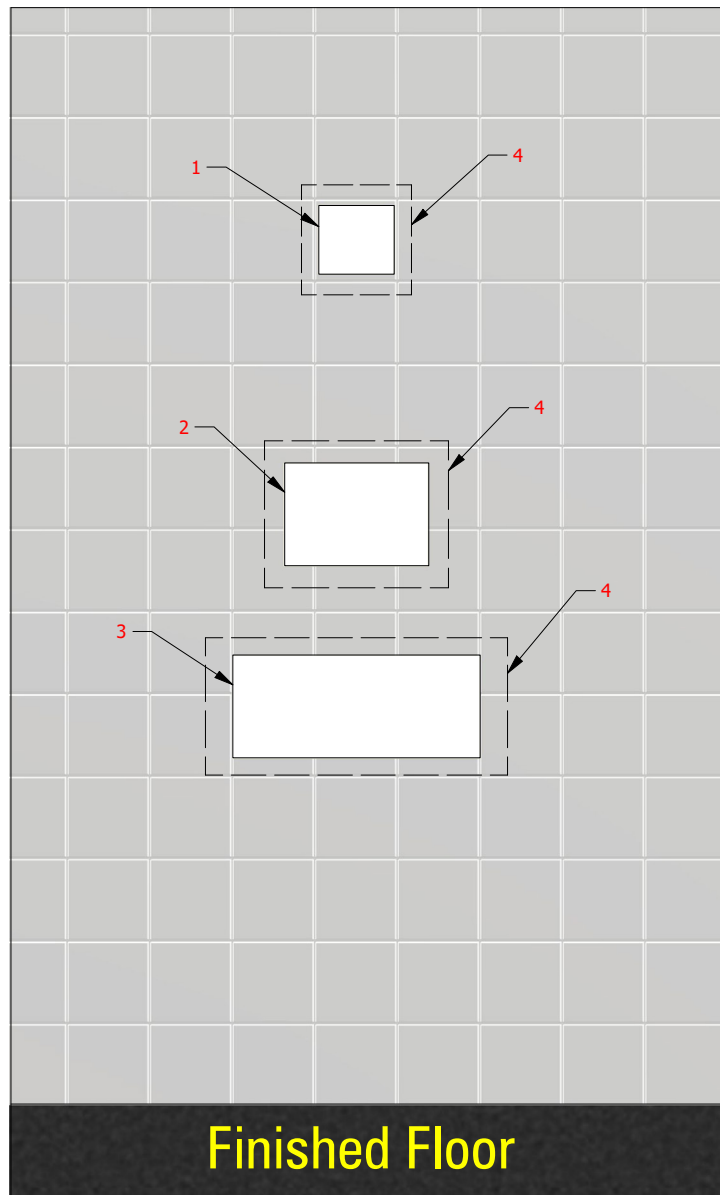

HOLES FOR CORE DRILLING OR STEEL PLATE WALLS