

## SHOWER FIXTURE - 710 SERIES

**Item:**



Unit may be pictured with some optional features.

Certified by  
QAI Laboratories


**WaterSense** certified showerhead options available.

## 710 Series

## Multi-Station Panelon Showers

## STANDARD FEATURES

- **Front mounted fixture**
- 17½ degree security shower heads with vandal resistant adjustable spray.
- Recessed soap dish.
- Single temperature pushbutton pneumatic metering valve.
- 2.5 gallon per minute flow
- **Hardware-**
  - Stainless steel vandal-resistant mounting screws for front cover.

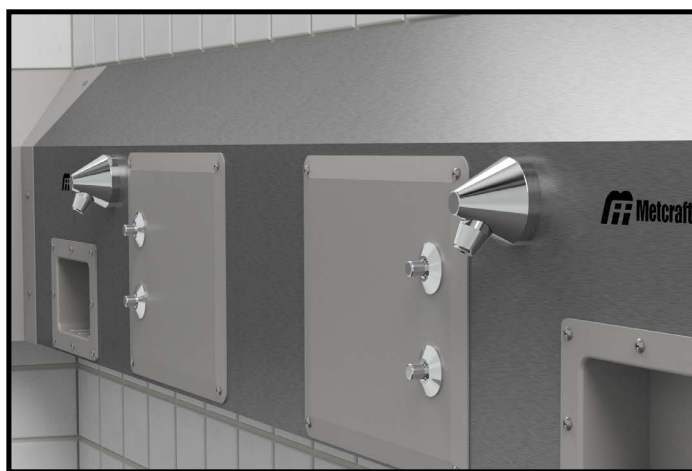

## ► DESCRIPTION

Panelon Showers are designed for areas without an accessible pipe chase. The panel is fabricated using heavy gauge type 304 stainless steel. Exposed surfaces are polished to a satin finish. Panel is secured to wall hanger brackets. Valve connections are made to supply piping (**Supplied by Others**) with flexible hoses before the panel is mounted to the wall hangers. Panels are constructed to suit room dimensions and plumbing piping requirements. Floor plans showing room configurations must be provided when ordering for preparation of submittal drawings for approval.

## ► INSTALLATION

The Panelon Shower mounts to the wall hanger brackets. The valve is provided with flexible hoses for connection to the supply piping. Hose fittings are 1/2" (13mm) FIPT with rubber seals. Access covers are supplied to allow access to internal piping and valves. The valve should be installed on the access panels unless specified. Once the valve is connected, access covers are secured to the wall frame using the vandal resistant stainless steel screws.

**Supply piping by others.**

## ► PERFORMANCE STANDARDS

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".

Listed by



**WARNING: Cancer and Reproductive Harm**  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## SHOWERHEADS - ABLE BODIED

- ☐ **PSH-1** Shower Head 30dg.
- ☐ **PSH-2** Shower Head 17.5dg. (Standard)
- ☐ **LBJ** Locking Ball Joint Shower Head.
- ☐ **DAS** Deluxe Adjustable Shower Head.

## SOAP DISHES

- ☐ **SO** Recessed Soap Dish. (Standard)
- ☐ **A501** Surface Mounted Soap Dish.
- ☐ **NSO** No Soap Dish Option.

## VALVE ASSEMBLIES

- ☐ **A311** Single Temperature, Single Fixture Valve.
- ☐ **A312** Dual Temperature, Single Fixture Valve.
- ☐ **205** Pressure Balanced mixing Valve.
- ☐ **205LR** Ligature Resistant Pressure Balanced mixing Valve.
- ☐ **204** Thermostatic/Pressure Balancing mixing Valve.
- ☐ **LHD** Lever Handle Diverter Valve

## FLOW CONTROLS

- ☐ **FC12** 1.2 gallon per minute flow.
- ☐ **FC14** 1.4 gallon per minute flow.
- ☐ **FC20** 2.0 gallon per minute flow
- ☐ **FC25** 2.5 gallon per minute flow

## OPTIONS/ACCESSORIES

- ☐ **160** Ceiling Supply Covers.
- ☐ **SLT** Sloped Top.
- ☐ **--** Top Supply Holes

## HC Station

### VALVE ASSEMBLIES

- ☐ **A313** Single Temperature, Manifold Valve.
- ☐ **A314** Dual Temperature, Manifold Valve.
- ☐ **205** Pressure Balanced mixing Valve.
- ☐ **205LR** Ligature Resistant Pressure Balanced mixing Valve.
- ☐ **204** Thermostatic/Pressure Balancing mixing Valve.
- ☐ **LHD** Lever Handle Diverter Valve

### FLOW CONTROLS

- ☐ **FC12** 1.2 gallon per minute flow.
- ☐ **FC14** 1.4 gallon per minute flow.
- ☐ **FC20** 2.0 gallon per minute flow
- ☐ **FC25** 2.5 gallon per minute flow

### OPTIONS/ACCESSORIES

- ☐ **160** Ceiling Supply Covers.
- ☐ **SLT** Sloped Top.
- ☐ **--** Top Supply Holes

## SHOWERHEADS - HC

- ☐ **PSH-1** Shower Head 30dg.
- ☐ **PSH-2** Shower Head 17.5dg.
- ☐ **206** Hand Shower with Vacuum Breaker.<sup>1</sup>
- ☐ **207** Quick Disconnect for Hand Shower.<sup>1</sup>
- ☐ **206-PB** Hand Shower Positioning Bar.<sup>1</sup>


## SOAP DISHES

- ☐ **SO** Recessed Soap Dish. (Standard)
- ☐ **A501** Surface Mounted Soap Dish.
- ☐ **NSO** No Soap Dish Option.

<sup>1</sup> Hand Shower not recommended for correctional or behavioral health applications!

## SHOWER FIXTURES - 710 SERIES

Item: \_\_\_\_\_

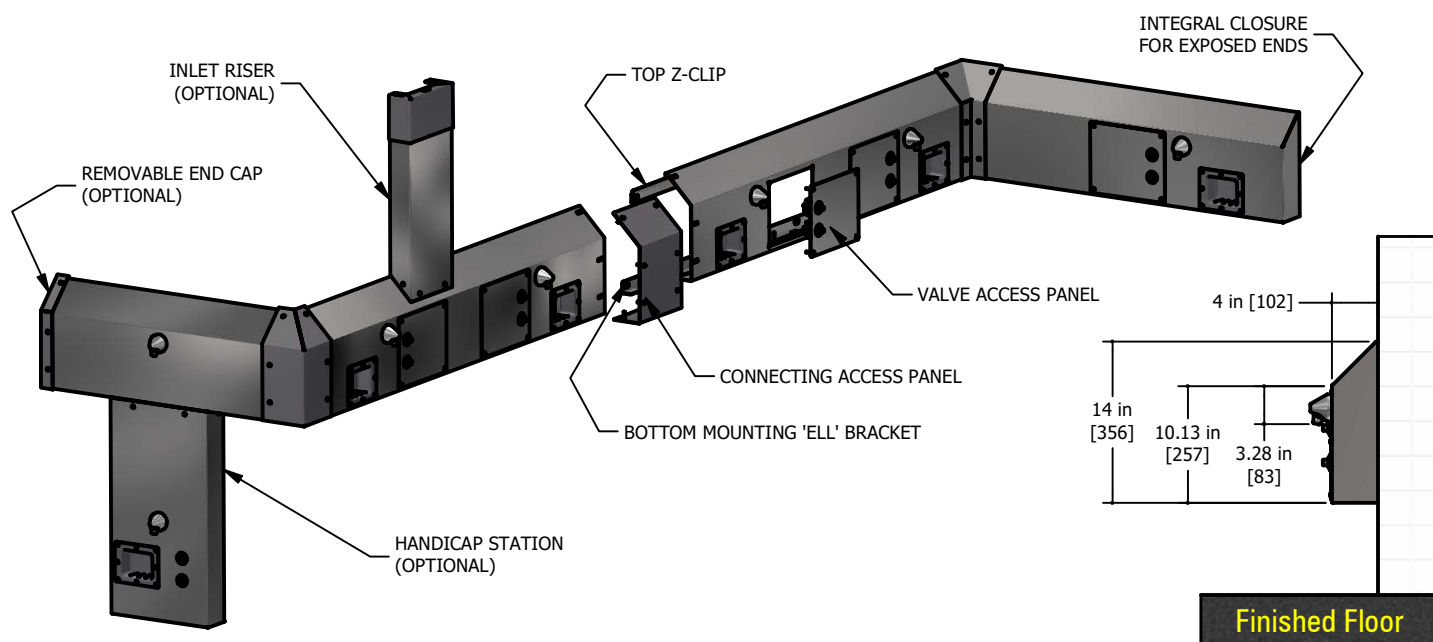

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

**APPROVED FOR  
MANUFACTURING**

Company: \_\_\_\_\_ Name: \_\_\_\_\_  
Signature: \_\_\_\_\_ Date: \_\_\_\_\_