

## SHOWER FIXTURE - 723 SHS

**Item:**



Unit may be pictured with some optional features.

**723-SHS**

### Three Station Surface Mounted Shower Fixture.

## STANDARD FEATURES

- **Front mounted fixture**
- 17 1/2 degree security shower heads with vandal resistant adjustable spray.
- Recessed soap dish.
- Single temperature pushbutton pneumatic metering valve.
- 2.5 gallon per minute flow
- **Hardware-**
  - Stainless steel vandal-resistant mounting screws for front cover.



Certified by  
QAI Laboratories

**WaterSense** certified showerhead  
options available.

## ► DESCRIPTION

This front mounted three station Shower Panel is designed for areas without an accessible pipe chase. The panel is fabricated using heavy gauge type 304 stainless steel. Exposed surfaces are polished to a satin finish. Panel is secured to a stainless steel wall frame using stainless steel vandal resistant screws. Valve connections are made to supply piping with flexible supply hoses before the panel is mounted to the wall frame.

## ► INSTALLATION

The wall frame mounts to the surface of the wall. Supply piping must be roughed into the wall frame for final connection. The valve is provided with flexible hoses for connection to the supply piping. Hose fittings are 1/2" (13mm) FIPT with rubber seals. The valve should be installed in the wall frame. Once the valve is connected, the shower panel is secured to the wall frame using the vandal resistant stainless steel screws.

## ► PERFORMANCE STANDARDS

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".

Listed by



**WARNING: Cancer and Reproductive Harm**  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**SHOWERHEADS**

- ☐ **PSH-1** Shower Head 30dg.
- ☐ **PSH-2** Shower Head 17.5dg.
- ☐ **LBJ** Locking Ball Joint Shower Head.
- ☐ **DAS** Deluxe Adjustable Shower Head.

**SOAP DISHES**

- ☐ **SO** Recessed Soap Dish. (Standard)
- ☐ **A501** Surface Mounted Soap Dish.
- ☐ **NSO** No Soap Dish Option.

**VALVE ASSEMBLIES**

- ☐ **A313-3** Single Temperature, Triple Fixture Valve.
- ☐ **205** Pressure Balanced mixing Valve.
- ☐ **205LR** Ligature Resistant Pressure Balanced mixing Valve.
- ☐ **204** Thermostatic/Pressure Balancing mixing Valve.
- ☐ **CS** Club Shower (Mixing Valve Plus Timed Pneumatic Valve)
- ☐ **LHD** Lever Handle Diverter Valve

**FLOW CONTROLS**



- ☐ **FC12** 1.2 gallon per minute flow.
- ☐ **FC14** 1.4 gallon per minute flow.
- ☐ **FC20** 2.0 gallon per minute flow
- ☐ **FC25** 2.5 gallon per minute flow

**OPTIONS/ACCESSORIES**

- ☐ **160** Ceiling Supply Covers.
- ☐ **SLT** Sloped Top.
- ☐ **--** Top Supply Holes

## SHOWER FIXTURES - 723 SHS

Item: \_\_\_\_\_

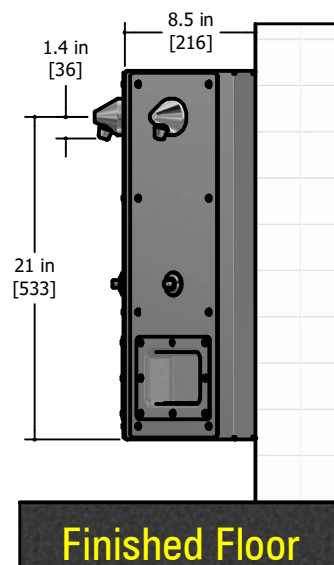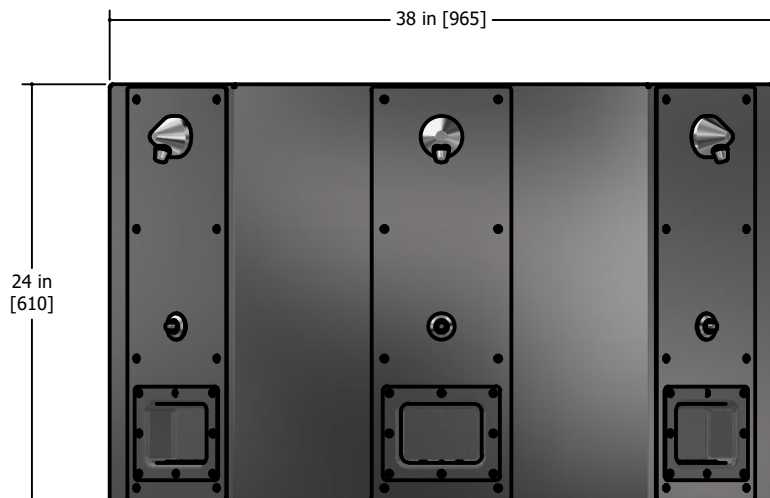

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

**APPROVED FOR  
MANUFACTURING**

Company: \_\_\_\_\_ Name: \_\_\_\_\_  
Signature: \_\_\_\_\_ Date: \_\_\_\_\_