

### SHOWER FIXTURE - 8650 R&L

Item: \_\_\_\_\_



Unit may be pictured with some optional features.  
8650L is shown, Orientation determined by control valve.

☐ **8650L**

Left Hand Wall Mounted Shower Fixture.

☐ **8650R**

Right Hand Wall Mounted Shower Fixture.

### STANDARD FEATURES

- **Front mounted fixture**
- 17 1/2 degree security shower heads with vandal resistant adjustable spray.
- Recessed steel mounting frame.
- Recessed soap dish
- Manifolded single temperature pushbutton pneumatic metering valve. One pushbutton controls upper shower head and a second pushbutton controls lower shower head.
- 2.5 gallon per minute flow
- **Hardware-**
  - Stainless steel vandal resistant mounting screws for front cover.



Certified by  
QAI Laboratories

**WaterSense** certified showerhead  
options available.



**WARNING:** Cancer and Reproductive Harm  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### ► DESCRIPTION

This front mounted Shower Panel is designed for areas without an accessible pipe chase. The panel is fabricated using heavy gauge type 304 stainless steel. Exposed surfaces are polished to a satin finish. Panel is secured to a stainless steel recessed wall frame using stainless steel vandal resistant screws. Valve connections are made to supply piping with flexible supply hoses before the panel is mounted to the wall frame.

### ► PERFORMANCE STANDARDS

This fixture meets or exceeds ASME A112.19.3 / CSA B45.4 standards for "Stainless Steel Plumbing Fixtures".

### ► INSTALLATION

The recessed wall frame is built into the wall structure as the wall is being erected. Supply piping must be roughed into the wall frame for final connection. The valve should be installed in the wall frame. Once the valve is connected, the shower panel is secured to the wall frame using the vandal resistant stainless steel screws. Lower shower head must be mounted 48" (1219mm) above finished floor to comply with A.D.A. guidelines. Fixture meets A.D.A. requirements when installed per A.D.A. guidelines.

Listed by



**SHOWERHEADS - ABLE BODIED**

- ☐ **PSH-1** Shower Head 30dg.
- ☐ **PSH-2** Shower Head 17.5dg.
- ☐ **LBJ** Locking Ball Joint Shower Head.
- ☐ **DAS** Deluxe Adjustable Shower Head.

**SHOWERHEADS - HC**

- ☐ **PSH-1** Shower Head 30dg.
- ☐ **PSH-2** Shower Head 17.5dg.
- ☐ **206** Hand Shower with Vacuum Breaker.<sup>1</sup>
- ☐ **207** Quick Disconnect for Hand Shower.<sup>1</sup>
- ☐ **206-PB** Hand Shower Positioning Bar.<sup>1</sup>

**SOAP DISHES**

- ☐ **S0** Recessed Soap Dish. (Standard)
- ☐ **A501** Surface Mounted Soap Dish.
- ☐ **NS0** No Soap Dish Option.

**VALVE ASSEMBLIES**

- ☐ **A313** Single Temperature, Manifolder Fixture Valve.
- ☐ **A314** Dual Temperature, Manifolder Fixture Valve.
- ☐ **205** Pressure Balanced mixing Valve.
- ☐ **205LR** Ligature Resistant Pressure Balanced mixing Valve.
- ☐ **204** Thermostatic/Pressure Balancing mixing Valve.
- ☐ **LHD** Lever Handle Diverter Valve.


**FLOW CONTROLS**

- ☐ **FC12** 1.2 gallon per minute flow.
- ☐ **FC14** 1.4 gallon per minute flow.
- ☐ **FC20** 2.0 gallon per minute flow
- ☐ **FC25** 2.5 gallon per minute flow


<sup>1</sup> Hand Shower not recommended for correctional or behavioral health applications!

## SHOWER FIXTURES - 8650 R&L

Item: \_\_\_\_\_

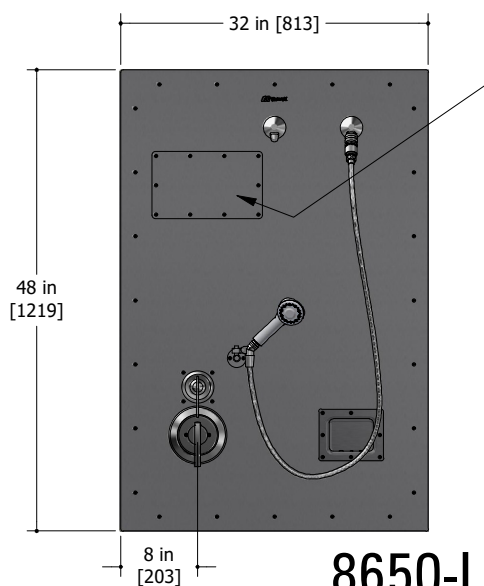

**8650-L**

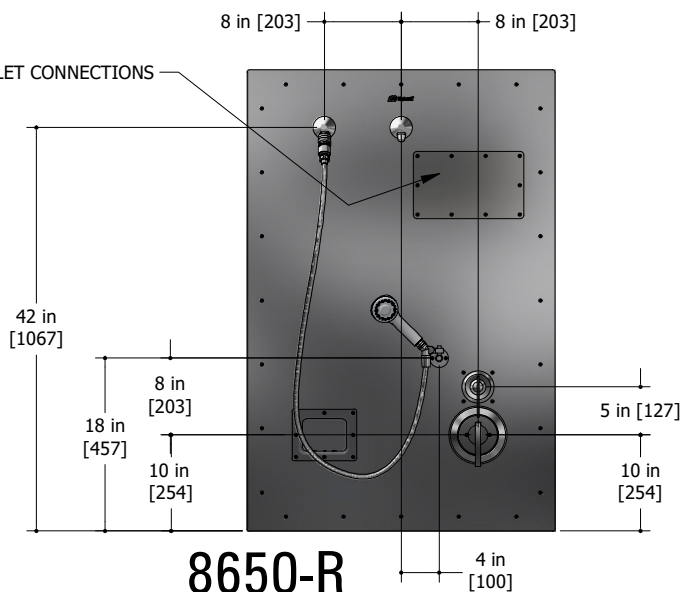

**8650-R**

Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.


**APPROVED FOR  
MANUFACTURING**

Company: \_\_\_\_\_ Name: \_\_\_\_\_  
Signature: \_\_\_\_\_ Date: \_\_\_\_\_

**Item:**  
**Shower Panel: 8650**



1. (4) 3/8" [1] Key-hole mount holes on back of box.
2. (4) 10" x 6" [25 x 15] Knock out panels on back of box.
3. #10-24 Captured nuts for tamper resistant panel mounting screws.
4. Mounting holes on side and top/bottom for wall anchoring.
5. Outline of fixture.

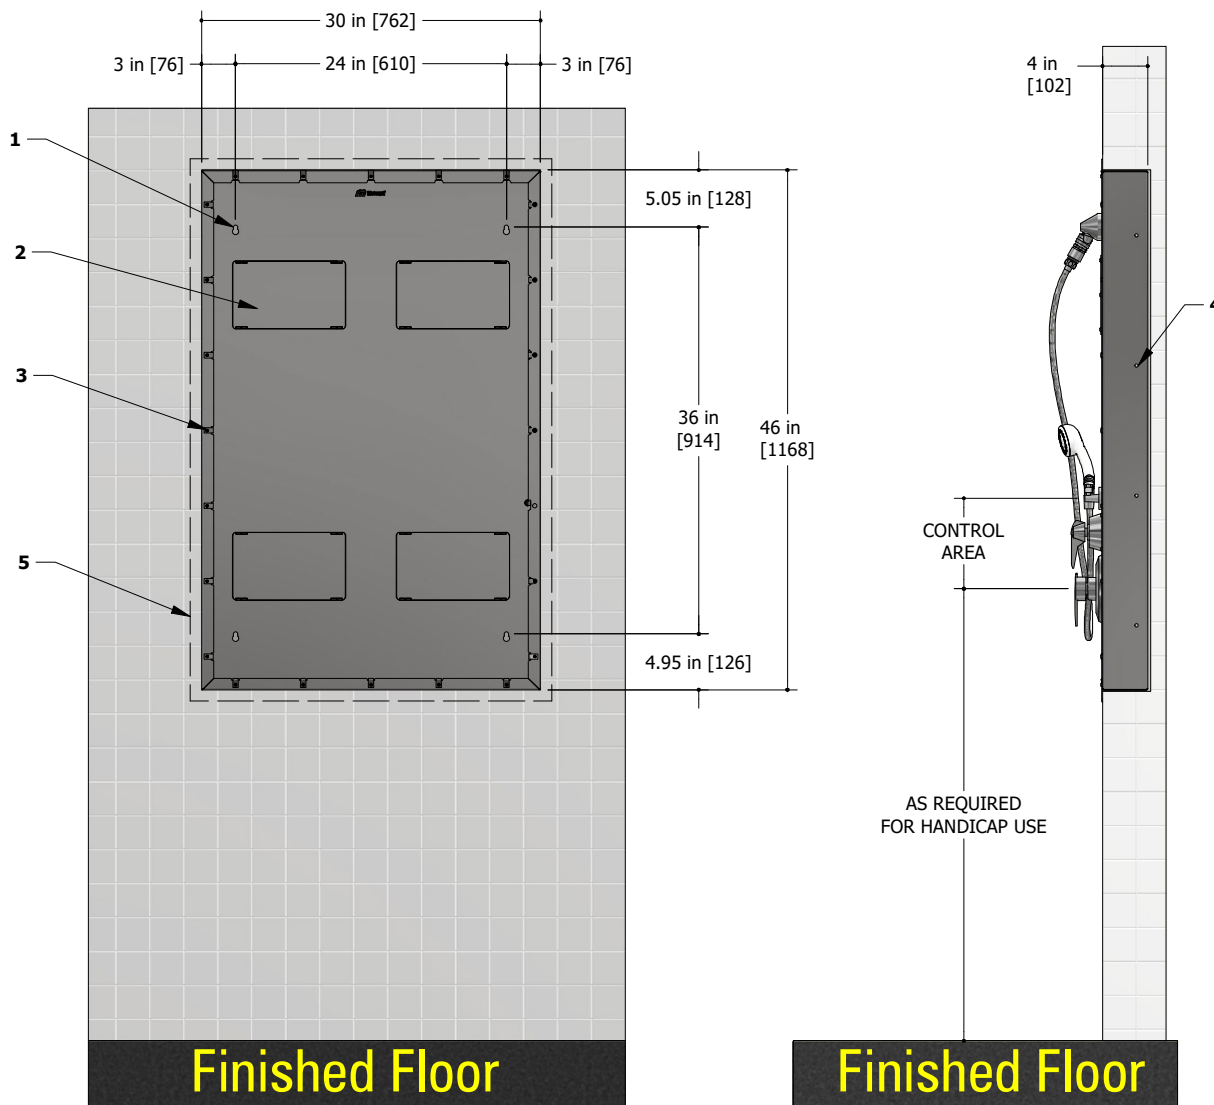

## MOUNTING ENCLOSURE INSET INTO WALL DETAIL