


## DETOX TOILET - 4500

**Item:** \_\_\_\_\_

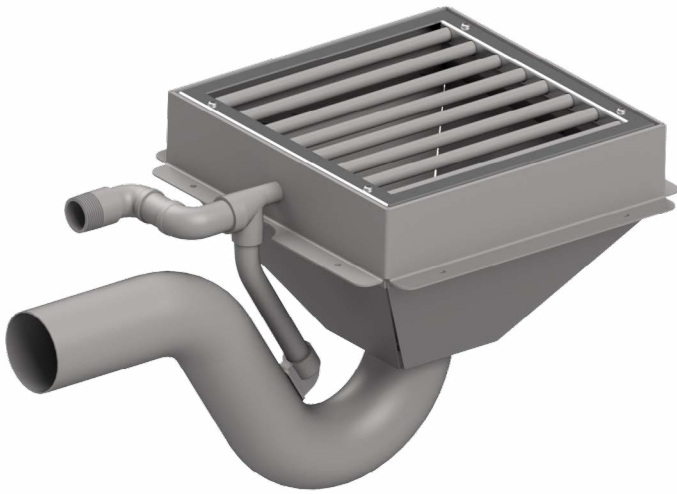

 **4500** Detox Toilet

## STANDARD FEATURES

- Blowout flushing action.
- Sanitary self draining full top flushing rim.
- Sump walls sloped to 3" (76mm) drain opening.
- 1/2" (13mm) dia. solid stainless steel bar grating.
- **Hardware-**
  - Anchoring flange.

Unit may be pictured with some optional features.



**WARNING: Cancer and Reproductive Harm**  
- [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## ► DESCRIPTION

Detox Toilets are designed for in-the-floor installation. They are fabricated using heavy gauge type 304 stainless steel, welded to form a vandal resistant toilet. The top flushing rim provides a full sanitary wash down of all sides. Vigorous flushing of the blowout type trap evacuates waste thoroughly. Solid stainless steel bars, 1/2" (13mm) dia., are welded to removable safety grate over sump. Safety grate is secured by stainless steel, vandal resistant security screws which permit removal for waste line cleaning.

## ► INSTALLATION

Detox Toilets are installed in the floor, usually when the slab is poured. The toilets are served by a remote flush valve installed outside the cell where the fixture can be flushed by corrections personnel. The fixture requires a 1" (25mm) water supply capable of sustaining a minimum 35 psi (241kpa) flushing pressure. The gallons per flush will vary depending on the distance between the Flush Valve and the Detox Unit.

## RECOMMENDED FLUSH VALVES

|          |             |
|----------|-------------|
| SLOAN    | ZURN        |
| 950-MBPM | ZH6150AV-MB |

## OPTIONAL ACCESSORIES

- ☐ **A620** Wall mounted S/S flush valve box w/access panel.


## NO-HUB CONNECTORS

- ☐ **A210-3** 3" s/s to 3" CI No-hub Connector.  
☐ **A210-1** 3" s/s to 4" CI No-hub Connector.


---

## DETOX TOILET - 4500

Item: \_\_\_\_\_

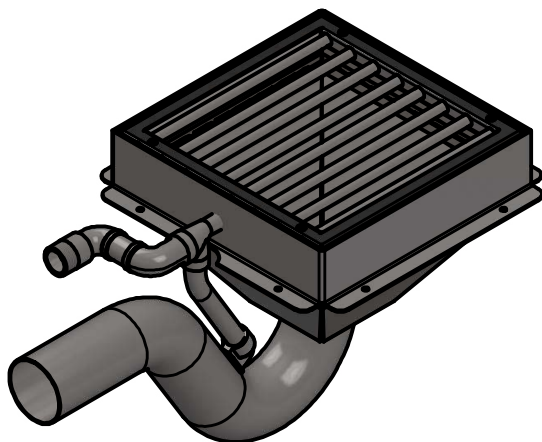

Finished Floor

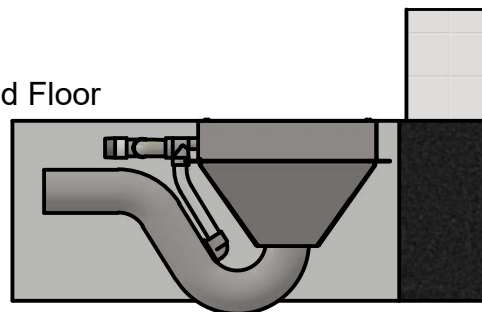


Due to continuous product improvement Metcraft reserves the right to make changes in design and specifications without prior notice. All dimensions should be verified with the factory for current information.

**APPROVED FOR  
MANUFACTURING**


Company: \_\_\_\_\_ Name: \_\_\_\_\_  
Signature: \_\_\_\_\_ Date: \_\_\_\_\_

**Item:**
**Toilet Fixture: 4500 In-Floor (detox)**

1. Sides with integral mounting brackets.
2. Removable grate with stainless steel round bars.
3. 1" NPT inlet.
4. 3" [76] O.D. stainless steel outlet tube.

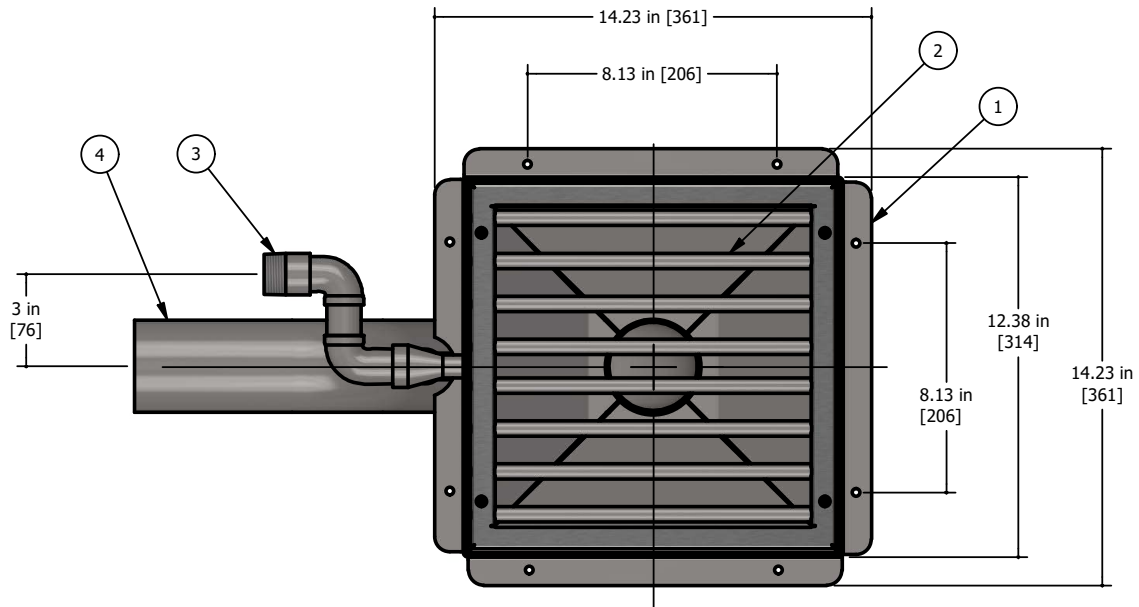

**PLAN VIEW**

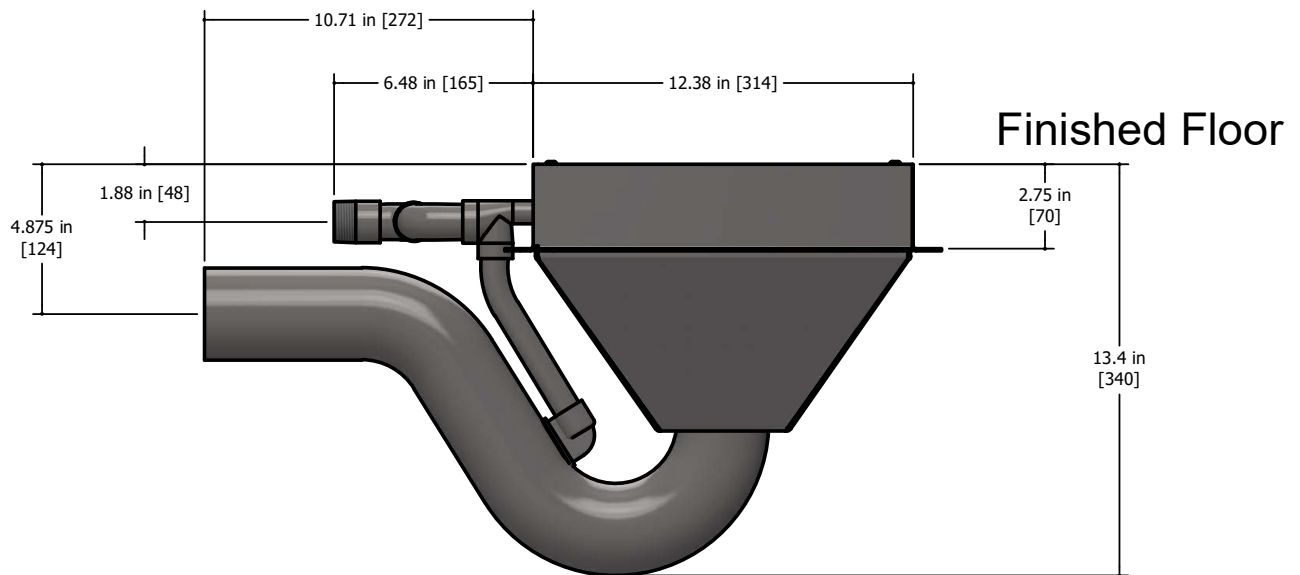

**SIDE ELEVATION**

FIXTURE IS INSET AND FLUSH WITH FLOOR  
RECOMMENDED FOR NEW CONSTRUCTION